



## Product Data Sheet

# 2505A-L

Industrial aluminium surface mount with steel armored cable

### Industrial Contact

The Sentrol 2500 series are designed to be installed in commercial and industrial environments where a rugged sealed unit is required. It is ideal for metal doors, overhead doors, fences and gates. Each model features a high strength extruded aluminum housing and is completely encapsulated in Sentrol's exclusive polyurethane potting compound.

### Durability and dependability

The Sentrol high performance magnetic contacts have been designed to facilitate installation and ensure durability and dependability. Most are conservatively rated at 10,000,000 cycles, guaranteeing a long life. Every reed connection is hand soldered and each magnetic contact is tested before they leave the factory, 100% of the time.

### High quality components and materials

Reed legs are plated with rhodium or ruthenium, and hermetically sealed in dry nitrogen. This offers superior protection against sticking and provides a moisture free environment therefore preventing corrosion.



### Standard Features


- Mounting brackets available for gates, garage door and freezers
- Rugged construction for a longer life
- Convenient surface mounting
- 2507AH series is polarity-sensitive with reference to magnet direction

# 2505A-L

Industrial aluminium surface mount with steel armored cable

## Specifications

Gap distance (max)	76 mm
Connections	90 cm stainless steel armored cable
Contact	NC
Supervised loop	No
Dimensions (L x W x H)	
Contact	76 x 13 x 25 mm
Magnet	76 x 13 x 25 mm
Color	Aluminum
Remarks	

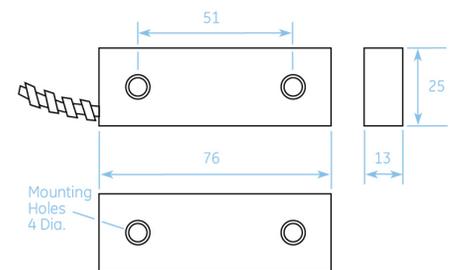

## Ordering Information

Part No.	Description
2505A-L	Industrial aluminium surface mount with steel armored cable

